Performance Specifications

		Measurement Range	Resolution	Accuracy				
DC Voltage		6.000V/60.00V/600.0V	0.01mV	±(0.5%+2dig)				
DC Voltage		1000V	1V	±(0.8%+2dig)				
AC Voltage		6.000V/60.00V/600.0V	0.1mV	±(0.8%+3dig)				
AC Voltage		750V	1V	±(1%+3dig)				
DC Current	μΑ	60.00uA/600.0µA	0.01µA	±(0.8%+2dig)				
	mA	60.00mA/600.0mA	0.01mA	±(0.8%+2dig)				
	А	10.00A	0.01A	±(1.2%+3dig)				
AC Current	μΑ	60.00uA/600.0µA	0.01µA	±(1%+3dig)				
	mA	60.00mA/600.0mA	0.01mA	±(1%+3dig)				
	А	10.00A	0.01A	±(1.5%+3dig)				
Resistance		600.0Ω/6.000kΩ/60.00kΩ/600.0kΩ/6.000MΩ	0.1Ω	±(0.8%+2dig)				
		60.00ΜΩ	0.01MΩ	±(2%+3dig)				
Capacitance		60.00nF/600.0nF/6.000µF/60.00µF	0.01nF	±(2.5%+3dig)				
		600.0µF/6.000mF/60.00mF	0.1µF	±(3%+5dig)				
Frequency		9.999Hz/99,99Hz/999.9Hz/9.999kHz/99.99kHz/99.9kHz/9.999MHz	0.001Hz	±(0.8%+2dig)				
Duty Ratio		0.1%~99.9% (typical value: Vrms=1V, f=1kHz)	0.1%	±(1.2%+3dig)				
		0.1%~99.9% (≥1kHz)	0.1%	±(2.5%+3dig)				
Temperature		-50°C~+400°C	1°C	±(2.5%+3dig)				
		-58°F~+752°F	1°F	±(4.5%+5dig)				
Display		5999						
Frequency		(40-1000)Hz						
Shift Rate on DMM		3 times / s						

Bluetooth Module	\checkmark (only in OW16B)	Auto-scale	\checkmark	
True RMS	\checkmark	LCD Backlight	\checkmark	
Diada Tast	1	Automatic-manual Range Selection	\checkmark	
Diode Test	V	Input Protection	\checkmark	
Auto Power-off	\checkmark	Input Impedance	≥10MΩ	
On-off Warning	\checkmark	Safety Compliance	600V CATⅢ, 1000V CATⅡ	
Low-battery Indicator	\checkmark	NCV	\checkmark	
Data Hold		Dimension (W×H×D)	154 x 73.5 x 50(mm)	
Relative Measurement	\checkmark	Weight (without package)	0.20 kg	

Specifications subject to change without prior notice.



The accessories subject to final delivery.





Multimeter Lead

Thermocouple



OUOO[®] created by LILLIPUT[®]


K-type

Fujian Lilliput Optoelectronics Technology Co., Ltd.

The Mansion of Optoelectronics, Hengsan Road Lantian Industrial Zone, Zhangzhou 363005 P.R. China

Tel:+86.596.213.0430 WWW.OWON.COM.CN



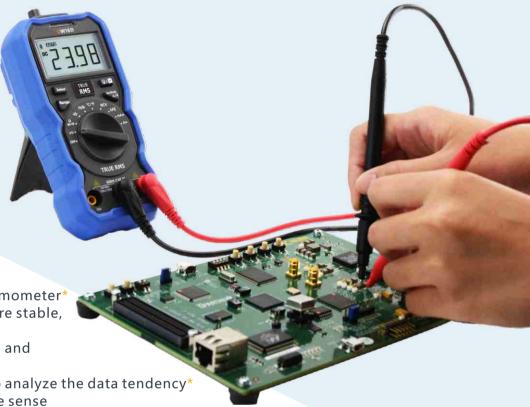

+ 3 5/6 digit resolution

- + Data Logger + Multimeter + Thermometer*
- + BLE 4.0 wireless transmission, more stable, less power consumption*
- + Support muti-devices connection and single-display monitoring*
- + Chart and Diagram mode helps to analyze the data tendency*
- + Support NCV non-contact voltage sense
- + Auto scale and True RMS test supported
- + Voice broadcast secures the test*
- + Build-in offline record function supports non-stop up to 7 days non-stop recording*
- + Widely supported on Android, iOS and Windows (needs optional Bluetooth adaptor) system.*
- + Easy to carry out with small body.

* Only for OW16B





mobile app accessible via scanning QR code

Bluetooth Digital Multimeter OW16A/OW16B

Bluetooth Digital Multimeter OW16A/OW16B

Portable design for easy carry



NCV non-contact voltage sense

While getting the non-contact voltage sensor close to conductor, the instrument will beeps and flash with the frequency according to AC voltage strength.

Support triode and temperature test



BLE 4.0 wireless transmission, support muti-devices connection and single-display monitoring

One mobile end can connect with multiple multimeters, the test object is totally isolated with user to secure their life.



Not only a multimeter, also a data logger and thermometer.

Real time data are updated and recorded to end user device, no need to be in field. User can define the record time and sampling gap, data can be shown as chart and diagram, multi-devices connection supports data comparison.


User and test object are totally isolated, which secure the life



Build-in offline record function


No need to put the end device in field, multimeter will save the data in its memory. Use the smartphone to load the data when connected.











 current at input — voltage at input the experiments upon the change of current and voltage when charging Li-ion battery

the experiments upon the current change of components under different temperature

Voice broadcast secures the test

current



After installing the TTS voice pack on smartphone, the app supports voice broadcast.

User can focus on wire connection without watching the display value. This assure the connection safety.

	owo	N BDM14530	13092 BDM145305		
	No.	Func	Value	Unit	
	12	DOILIN	ULU. 1	111.4	
	20	DCm∖	292.2	mV	
\sim	21	DCm/v	188.9	mV	
	22	DCm/v	144.9	mV	
	23	DCm∖	280.2	mV	
	24	DCmV	363.3	mV	
	25	DCm/v	528.1	mV	
	26	DCmV	553.0	mV	
	27	DCmV	431.3	mV	
<u>ن</u> م	C	อ	ゴ	Ĩ	Ð

Widely supported on Android, iOS, and Windows (needs optional Bluetooth adaptor) System.