

ODP Series Programmable DC Power Supply



max
378W
power output



Triple Output



- + Three independent controllable channels
- + Max output resolution : 1mV / 1mA
- + Low ripples / low noise
- + Up to 100 group timers
- + Multi- working mode : individual, parallel, and series
- + Over-voltage / Over-current protection
- + Data-logging function: could record the output voltage, and current; and display recorded data in chart
- + Auto-cooling system
- + 4 inch high resolution (480 × 320 pixels) LCD
- + Multi- CI: USB, RS232, and LAN
- + SCPI, and LabVIEW supported

Creative Data Recording Function

to monitor the changing status of powering system, displaying recorded data in chart.

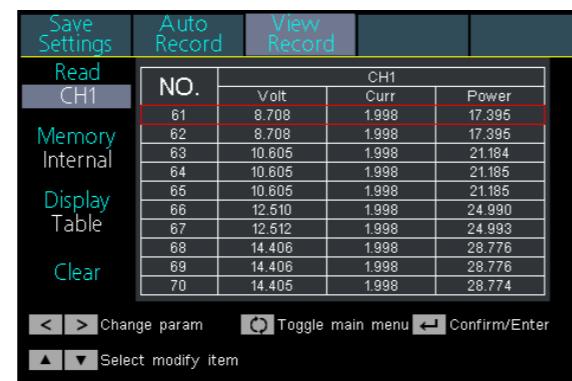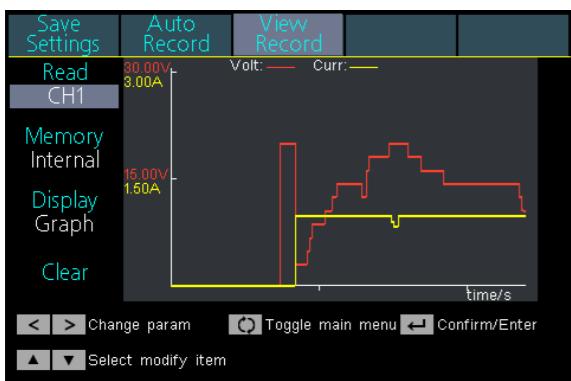

Model	ODP3033	ODP3063	ODP6033
Channel	3 (independent controllable channel)		
Max Output Power	198W	378W	378W
Output Range	0 - 30V / 3A x 2-CH, 0 - 6V / 3A	0 - 30V / 6A x 2-CH, 0 - 6V / 3A	0 - 60V / 3A x 2-CH, 0 - 6V / 3A

Display

Model	ODP3033	ODP3063	ODP6033
LCD Type	4 inch color LCD		
Display Resolution	480 x 320 pixels, 65536 colors		

Mechanical Specifications

Model	ODP3033	ODP3063	ODP6033
Dimension (W x H x D)	250 x 158 x 358 (mm)		
Device Weight	9.80 kg	12.00 kg	

Performance Specifications

The specifications based upon the instrument having run for at least 30 minutes continuously, under the specified operating environment.

Model	ODP3033	ODP3063	ODP6033	all 3 models
Channel	CH 1	CH 2	CH 1	CH 2
Output Ratings (0°C - 40°C)	Voltage	0 - 30V	0 - 30V	0 - 60V
	Current	3A	6A	3A
Load Regulation	Voltage			≤0.01% + 3mV
	Current			≤0.01% + 3mA
Line Regulation	Voltage			≤0.01% + 3mV
	Current			≤0.01% + 3mA
Settings Resolution	Voltage			1mV
	Current			1mA
Read Back Resolution	Voltage			1mV
	Current			1mA
Settings Accuracy (25°C ± 5°C) (within 12 months)	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 8mA
Read Back Accuracy (25°C ± 5°C)	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 8mA
Noise and Ripple (20Hz - 20MHz)	Voltage (Vp-p)			≤4mVp-p
	Voltage (rms)			≤1mVrms
	Current (rms)			≤5mArms
Output Temperature Coefficient (0°C - 40°C)	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 5mA
Read Back Temperature Coefficient	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 5mA
Parallel Settings Accuracy	Voltage			≤0.02% + 5mV
	Current			≤0.1% + 30mA
Programmable Output	Storage			100 groups
	Time Setting			second
Data Recording				10 K groups (of voltage, current and power data) recording capacity
Working Temperature				0 - 40°C
Communication Interface				USB, RS232, and LAN

Specifications subject to change without prior notice.

Application

R&D laboratory
automobile, and electronic circuit test

QC test
education / teaching experimentation

industrial automation test

Accessories

The accessories subject to final delivery.

Power Cord	CD Rom	Manual	USB Cable	Fuse	Test Leads (optional)