



Programmable AC Power Source

APS-7000 Series

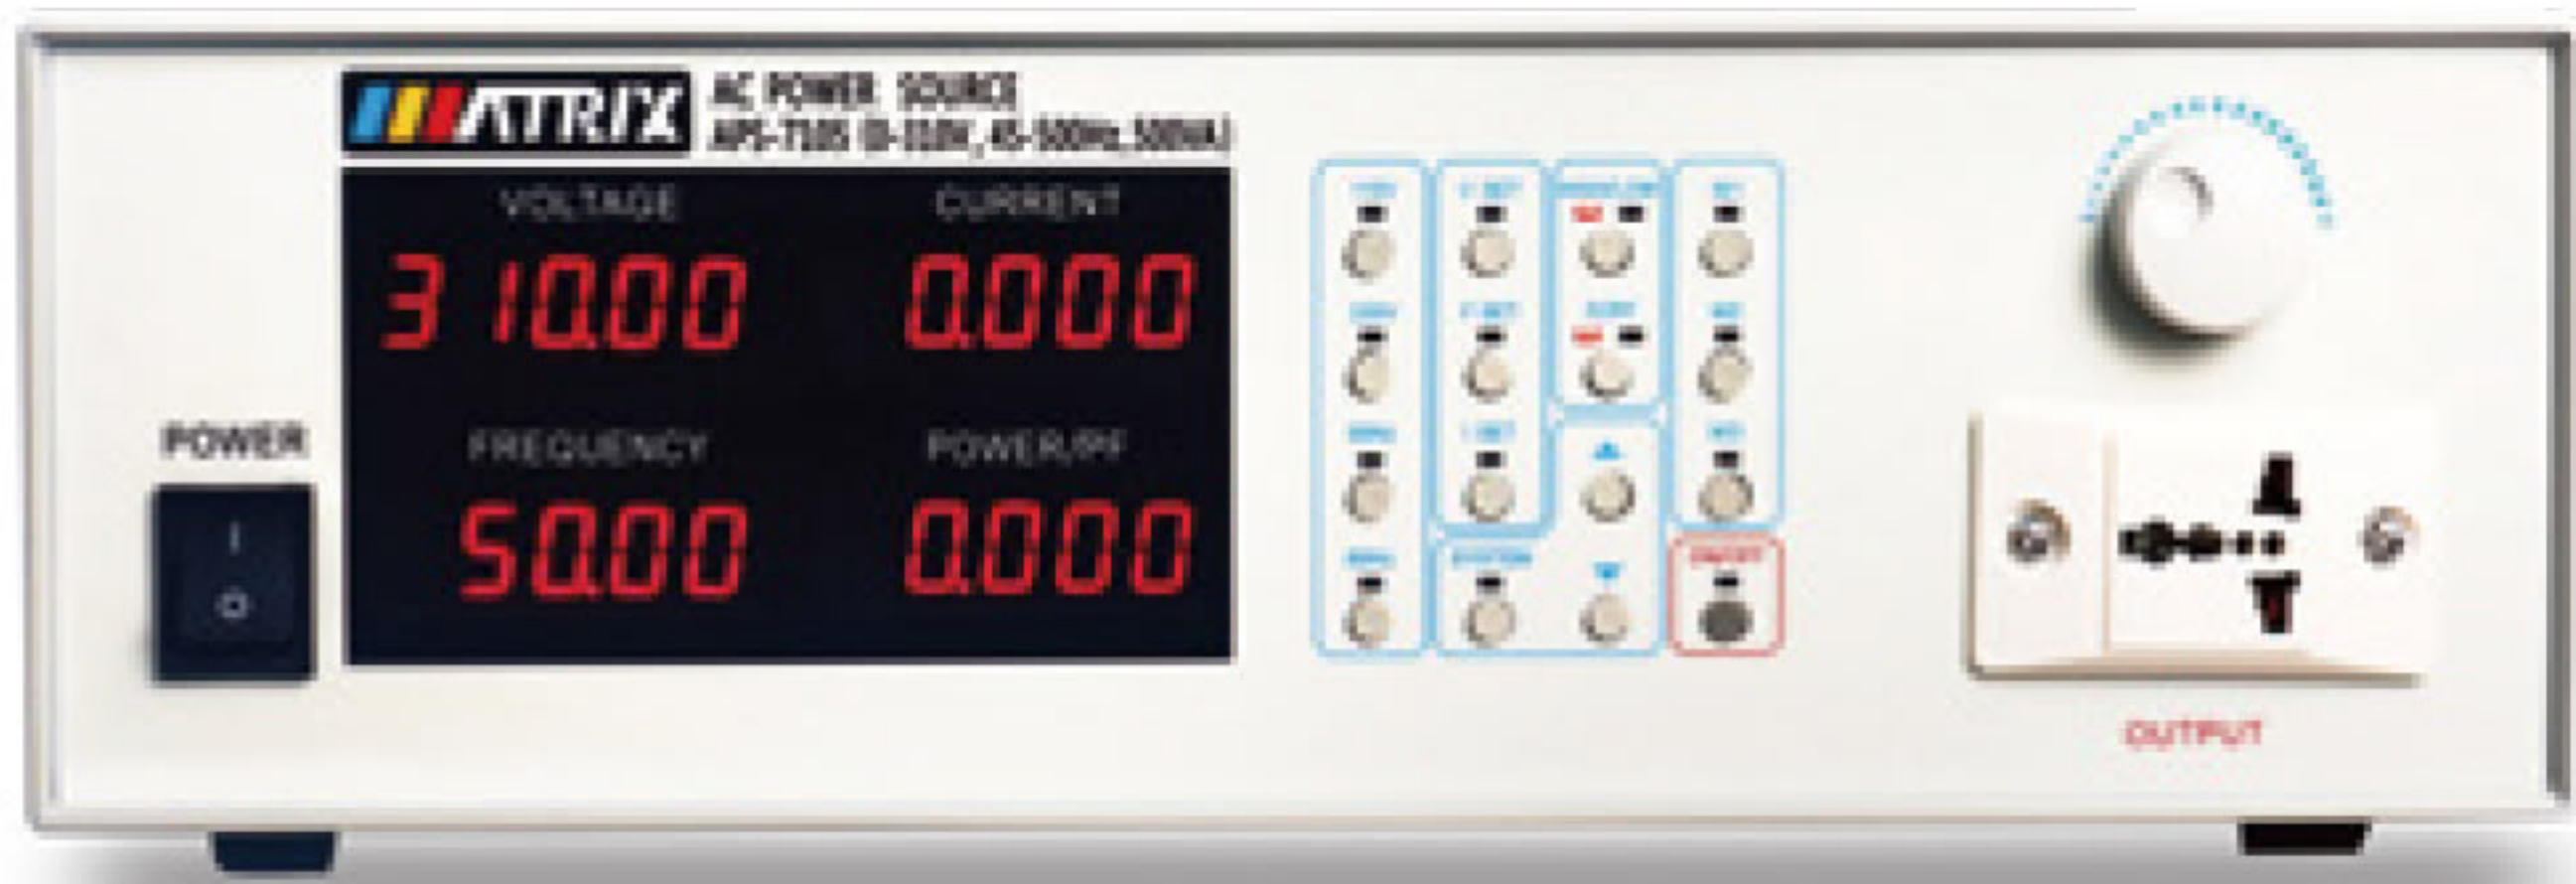

APS-7105/7100

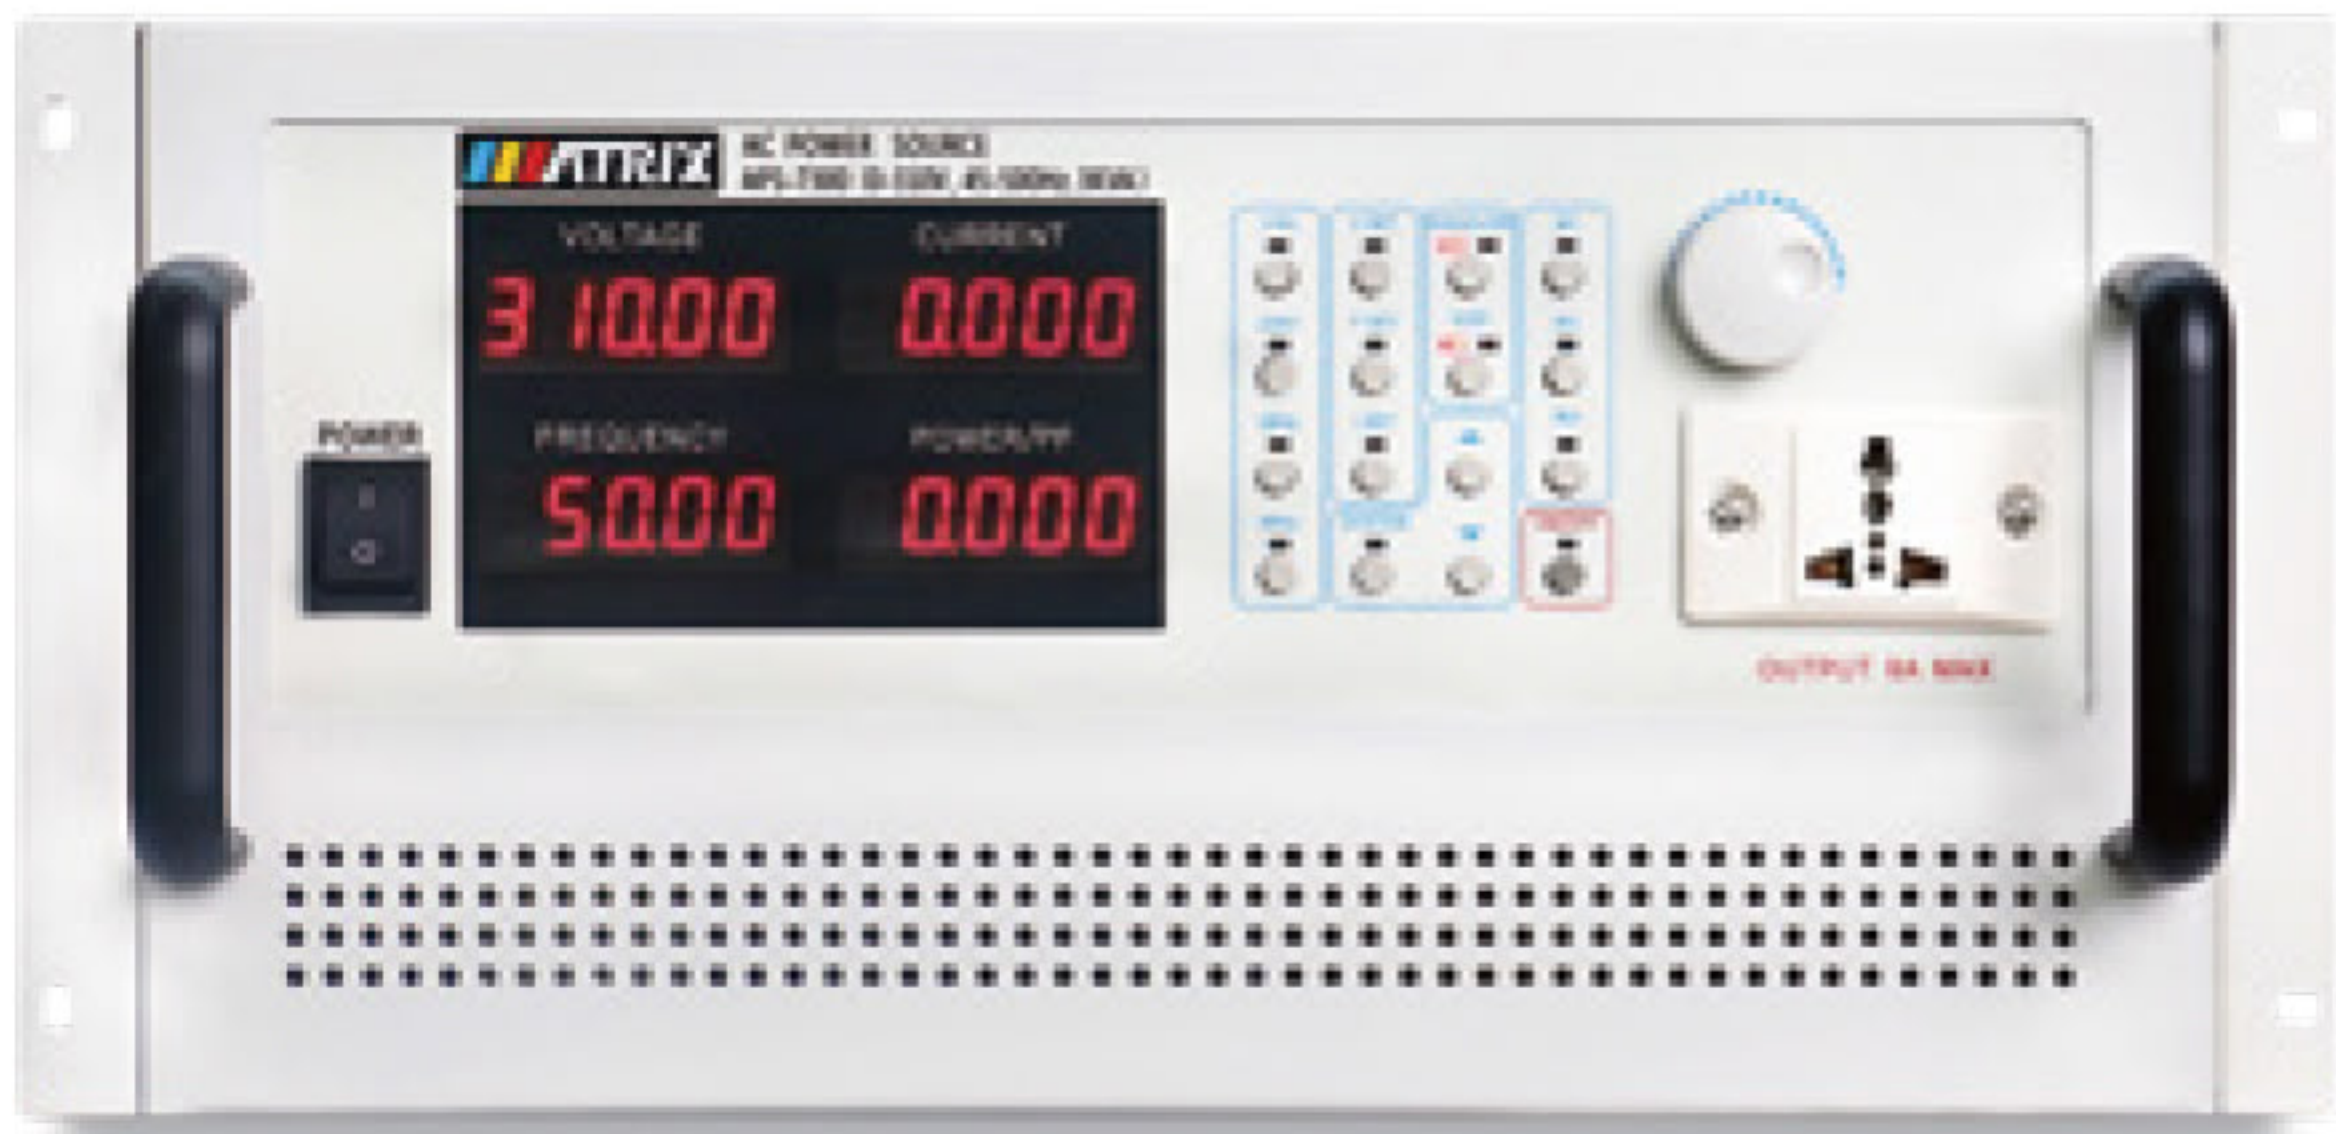

APS-7200/7300

- The advanced direct digital frequency synthesizer (DDS) waveform is used to achieve high frequency stability, good continuity and accurate measurement
 - Keyboard shortcuts: 110V, 220V, 50Hz, 60Hz shortcuts self-assembly
 - Key lock function prevents inadvertent touch
 - With key lock M1, M2 and M3 three sets of memory, can store the commonly used voltage V and frequency F, easy to recall them by one key
 - Five display windows: voltage V, frequency F, current I, power P/power factor PF, display more accurately
- Overload capacity, 300% overload 2S
 - Intelligent analysis function: automatically determine the cause of failure ,status and display the code when the alarm is reported
 - With 100% loading and unloading, the stabilizing reaction time is within 20ms
 - RS485, RS232, Ethernet communication interface or simulation control mode (optional)
 - Adopt input and output isolation mode
 - Has soft start function to avoid the damage to power supply caused by the instantaneous impulse current of the load (such as motor) when power on.

Standard RS-232 ☒ Synchronous signal output ☒

Optional RS485 ☐

Model		APS-7105	APS-7100	APS-7200	APS-7300
Capacity		500VA	1KVA	2KVA	3KVA
Working mode		SPWM			
The input					
Number of phase		1Φ2W			
Voltage		220V±10%			
Frequency		47Hz-63Hz			
The output					
Number of phase		1Φ2W			
Voltage		0-150VAC/0-310VAC AUTO (0-600V Can be customized)			
Frequency		45-500Hz (0.1Step)			
Maximum current	L=120V	4.2A	8.4A	16.8A	25A
	H=240V	2.1A	4.2A	8.4A	12.5A
Load regulation		1%			
T.H.D		2% Low grade 120V, high grade 240V, with pure resistive load			
Frequency stability		0.01%			
Display		Vrms、Arms、Fre、Wattage、PF			
Voltage resolution		0.01V			
Frequency resolution		0.01Hz			
Current resolution		0.001A			
Storage		M1(V_F_A)、M2(V_F_A)、M3(V_F_A)			
Communication interface		RS-232 standard, RS485 optional			
Set the current limit		0-MaxCurrent(P/240 Maximum current is: maximum capacity /240V is P/240)			
The output protection		OverCurrent OverTemp OverLoad ShortCircuit			
Operation environment		0-40℃ 20-80%RH			
Net weight (kg)		20.6	20.6	30.5	33.3
Gross weight (kg)		23.1	23.1	33.2	36
Instrument size (W*H*D)		480*135*515	480*135*515	480*225*535	480*225*535
Packing size (W*H*D)		575*255*645	575*255*645	575*255*645	575*255*645