


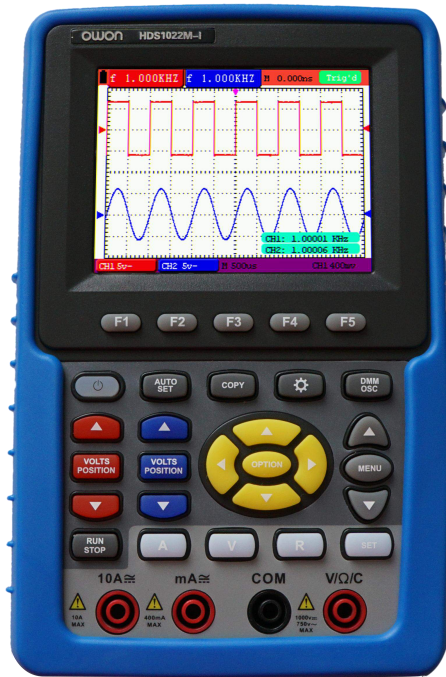

HDS1022M-I Handheld DSO w/ Channel Isolation

- + 2 in 1 (DSO + Multimeter)
- + with good **ISOLATION** between channels
- + The channel-to-channel isolation has a safety rating of 1000 V, CAT II
- + Auto-scale function
- + FFT function
- + 20 group automatic measurement options
- + Bandwidth : 20MHz
- + USB data transmission supported
- + Rechargeable Li-ion battery
- + Multimeter newly supported SCPI

+ Performance Specifications

Model	HDS1022M-I
Bandwidth	20MHz
Sample Rate	100MS/s
Rise Time (at input, typical)	≤17.5ns
Record Length	6K points
Channel	dual, insulated ground of 1000 : 1
Display	3.7" color TFT LCD, 640 x 480 pixels
Floating Meas. Channel	insulated input ground between multimeter / oscilloscope mode
Input Coupling	DC, AC, and GND
Input Impedance	1MΩ±2%, in parallel connection with 15pF± 5pF
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2 - 5
Interval (ΔT) Accuracy	single: ±(1 interval time + 100ppm x reading + 0.6ns), average>16: ±(1 interval time + 100ppm x reading + 0.4ns)
Vertical Sensitivity	5mV/div - 5V/div (at input)
Vertical Resolution	8 bits
Max Input Voltage	400V (PK - PK) (DC + AC, PK - PK, 1MΩ input impedance, probe attenuation 10 : 1), CAT II
Trigger Type	Edge rising edge, falling edge
	Video line, field, random line, odd / even fields
	Alternate
Trigger Mode	Auto, Normal, and Single
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B  , Delay A→B  , +Width, -Width, +Duty, -Duty
DC Accuracy (average)	average>16: ±(5% reading 0.05 div) for ΔV
Waveform Math	+, -, *, / , FFT, invert
Waveform Storage	4 waveforms

Lissajous Figure	Bandwidth	full bandwidth
	Phase Difference	±3 degrees
Cursor Measurement	△V, and △T between cursors	
Communication Interface	USB host, and USB device	
Battery	built-in Li-ion battery, 7.4V / 3500mAh	
Dimension (W / H / D)	113 x 180 x 40 mm	
Weight	645.00 g	

+ Multimeter Specifications

Full Scale Reading	3 $\frac{3}{4}$ digits (max 4000 count)	Diode	0V - 1.5V
Input Impedance	10 MΩ	On / Off Test	< 50 (± 30) beeping
Voltage	VDC : 400mV, 4V, 400V, 1000V : ±(1% ± 1 digit); max input : DC 1000V VAC : 4V, 40V, 400V : ±(1% ± 3 digits), Frequency : 40Hz - 400Hz; max input : AC 750V (virtual value)		
Current	DCA: 40mA, 400mA: ±(1.5% ± 1 digit), 10A: ±(3% ± 3 digits) ACA: 40mA: ±(1.5% ± 3 digit); 400mA: ±(2 ± 1 digit); 10A: ±(3% ± 3 digits)		
Impedance	400Ω: ±(1% ± 3 digits); 4KΩ / 40KΩ / 400 KΩ / 4MΩ: ±(1% ± 1 digit); 40MΩ: ±(1.50% ± 3 digits)		
Capacitance	51.2nF - 100uF : ±(3% ± 3 digits)		

Specifications subject to change without prior notice.

+ Application

electronic circuit debugging
education and training

circuit testing design and manufacture
automobile maintenance and testing

+ Accessories

The accessories subject to final delivery.



Power Cord



CD Rom



USB Cable



Probe



Probe Adjust



Multimeter Lead



Adapter



5V, 1KHz Output



Manual



Capacitance Ext
Module



Metal Case



Soft Bag
(optional)